

Invisible audio solution to be installed into ceilings and products of various materials like plasterboard, wood, fiberglass etc.

Figaro uses the principle of the vibrations transmission through rigid surfaces transforming them into a speaker.

Figaro uses a new and innovative ultra flat wire allowing a very fast installation thanks even to the FastLock™ system.

FIGARO

Technical Data

Type

2 ways speaker
Control: by Ffil or Famp
Max power: 25W
Impedance: 4 ohm
IP: 20
Cooling: natural dissipation
Working temp. range: 0 C° > +70C°
Working humidity (%): 5 - 95

Dimensions and weight

Max high: 72mm
Max widt: 130mm
lenght: variable
Total weight: 900g

Directions


Direttiva 89/336/CE—Comp. elettromagnetica
Direttiva 73/23/CE—Comp. bassa tensione
Made in Italy
CE

Main applications

Plasterboard
plywood
MDF
Plexiglass
Composite materials
Metal
Glass
Corian by Du Pont
others

Warranty and assistance

Warranty: as forecasted by the CE laws
Assistance: info@esarc.com

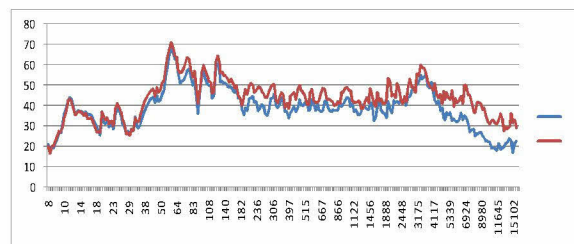

Freq. Response on a plasterboard panel DIN 120x100x8mm @1m (red line) e @2m (blue line)