

Products

Figaro™ is available with a built-in amplifier (F-Amp) or in a passive version (F-Fil).

For both solutions of Figaro™ you can require all the product components mounted on a practice MDF board or keep them ungroup, to ease your own installation.


Figaro F-Amp

The Figaro™ F-Amp has an amplifier with automatic stand-by, 2x25W.


It is installed for instance behind false ceilings and normally it is connected to a wall socket.

Just connect (i.e. bluetooth) any audio source (hi-fi, tv, tablet, smartphone...) and the room will be filled by the sound, immediately.

Figaro F-Amp (with amplifier)

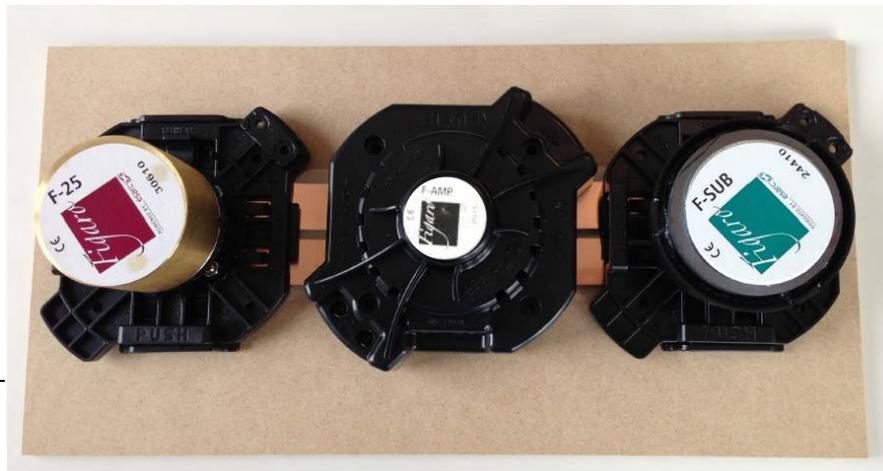

System: active acoustic diffusor Hi-Fi 2 way
Dimensions e Weight: 35.5 x 18 x 8.5 cm 1,150 kg
Max Power: 2 x 25 Wrms
Impedance: 10 kOhm
Alimentation: input 110/230V – output 12V – 3A
Frequency Response: 53Hz – 20kHz
Input: Line in jack 3.5 mm, diametro max 0.8 cm
Volume Regulation: by audio source
Angle Degrees: >180
Installation: invisible, behind false-ceiling/wall/panel

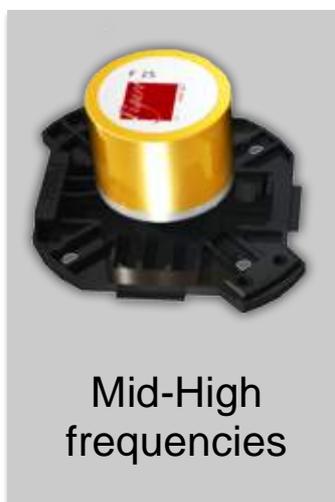

Mid-High
frequencies



Mid-Low
frequencies



Amplifier